



**ISSN: 2454-9940**



**INTERNATIONAL JOURNAL OF APPLIED  
SCIENCE ENGINEERING AND MANAGEMENT**

**E-Mail :**  
**editor.ijasem@gmail.com**  
**editor@ijasem.org**

**[www.ijasem.org](http://www.ijasem.org)**

# Parameter Estimation of a Frame Structure Based on Static Displacement Measurements

*Manchala Priyamvadha<sup>1</sup>, MD.ishaq Pasha<sup>2</sup>,*

## Abstract

*An analytical method is investigated to identify the damage of a frame structure from static displacement measurements. This method is to adjust the parameters of the frame structure to match the analytical and measured displacements. Based on a set of applied static forces and static displacement measurements of the frame structure, the damage condition of the frame structure can be obtained by optimizing the objective function. In addition, the effect of the number of displacement sensors on the parameter identification was studied using parameter identification of a two-story steel frame structure. This method can accurately identify the damage of the frame structure using limited displacement measurements. Index Terms—frame structure, parameter identification, displacement measurement*

## INTRODUCTION

Detecting the health of and identifying the damage to a structure in a timely manner is critical for structural safety. With the development in sensor manufacturing technology, many new techniques for structural-damage identification using different types of structural response have been developed. These identified damages to the structure using these techniques can be divided into two methods based on the dynamic [1] and static [2] responses. According to the static-response data, Sanayei et al. [3] proposed a method for detecting the damage condition of truss and frame structural elements. Hajela et al. studied the structural damage detection method based on static responses and modal Analysis [4]. Chou et al. presented a structural damage technique to identify the changes in the characteristic properties of structural members using static measurements of displacements [5]. BakhtiariNejad et al. presented a structural damage detection algorithm based on static test data, that relate the changes in the static response to the location and severity of the damage [6]. Kesavan et al. analyzed the damage criticality assessment method in complex geometric structures using static strain response-based signal processing

techniques [7]. Chen et al. proposed a new structural damage identification technique using limited test static displacement based on grey system theory, that is used to locate damage in the structure and identify the damage magnitude [8]. Kaushik et al. introduced the details of the numerical studies carried out on the application of the damage locating vector method for damage localization using deflection data from the static analysis [9]. Li et al. presented a static-based method for damage identification in the simply supported beam structure based on the incomplete measured static displacement parameters [10]. Colombo et al. proposed a methodology to perform structural health monitoring leveraging the inverse finite element method and numerically demonstrated using a structure subjected to fatigue crack damages [11]. Tian et al. proposed a damage identification method based on static strain responses using Fiber Bragg Grating in a wind turbine blade and verified the accuracy and effectiveness of the proposed method [12]. Xiao et al. investigated the optimal placement of static strain sensors for structural damage identification and analyzed the

*Professor<sup>1</sup>, Assistant Professor<sup>2</sup>  
Department of CIVIL Engineering,  
Pallavi Engineering College,*

*Mail ID:priyamvadamanchala@gmail.com, Mail ID: mdishaq25312gamil.com,  
Kuntloor(V),Hayathnagar(M),Hyderabad,R.R.Dist.-501505.*

identification effects of different optimization methods [13, 14]. Lozano-Galant et al. presented an observability technique to identify structural parameters in cable-stayed bridges by using static monitoring information [15]. Adbo [16] analyzed the relationship between damage characteristics and changes in displacement curvatures and applied it to the damage identification of beams. Using static test data, Yang et al. [17] proposed a parameter identification method to identify the location and extent of structural damage. Sohail et al. presented an approach to identify the change in structural parameters of flexural rigidity of a frame model using few response measurements [18]. Liao et al. [19] presented a method for finite element model updating based on the quasi-static generalized influence line of the structure. These studies have obtained the damage condition of structural elements using static test data and enriched the damage identification studies based on static measurements. To obtain the overall damage condition of a structure, Seyed et al. proposed a two-stage approach for damage identification of two-dimensional frame structures based on the dynamic response [20]. Yang et al. investigated structural-damage identification methods using static and dynamic data [21]. Jamalkia et al. proposed a fuzzy-based damage identification method based on the dynamic response of the floating wind turbine structure [22]. Lee et al. presented a damage detection method based on the second derivative of flexibility estimated from incomplete mode shape data [23]. Lofrano et al. studied optimal sensors placement method in dynamic damage identification of beams based on a statistical approach and verified the capability and reliability of the method [24]. Cheng et al. proposed an innovative two-level damage identification technique applicable to real-world online structural health monitoring systems for in-service large steel arch bridges [25]. Meixedo et al. presented an unsupervised automatic data-driven methodology to detecting damage in railway bridges based on traffic-induced dynamic responses [26]. Pooya et al. proposed an efficient and novel method for parameter identification in beam-like structures solely based on damaged structure data and using mode shape curvature estimation [27]. Khosravan et al. developed a novel method called the improved modal strain energy decomposition method to detect structural damage of jacket-type offshore platforms using a limited number of sensors just above the water [28]. For the parameter identification based on

static responses, these methods were designed to provide comprehensive structural information and optimization methods. In the damage-identification process, the number of sensors are also important factors that affect the efficiency of the parameter identification and need further research. The present study analyzed a parameter-identification method for frame structures based on static-response data. The effect of the number of displacement sensors and their arrangements on the damage identification was analyzed using parameter identification of a two-story steel frame structure.

## OBJECTIVE FUNCTION FOR PARAMETER IDENTIFICATION

Constructing the objective function is a key factor in structural parameter identification. In this study, applied static forces were used to excite the frame structure, and the measured displacements were calculated based on the “as-is” condition. Then, the analytical displacements were obtained using the stiffness method, which contained unknown parameter  $p$  that required to be updated [13, 29]. Objective function  $f(p)$  is defined based on the analytical and measured displacements.

$$f(p) = \sum_{i=1}^n (D_a^i - D_m^i)^2 \quad (1)$$

where  $p$  (including the cross-sectional area  $A$  and moment of inertia  $I$ , which reflect the axial and bending rigidity that represent the deformation resistance of the frame structure) represents the unknown parameters of the damaged frame structure.  $D_a$  is the analytical displacement, and  $D_m$  is the measured displacement.  $n$  is the total number of measured displacements used to identify the structural damage. Unknown parameters  $A$  and  $I$  can be obtained when the objective function approaches zero.

## PARAMETER IDENTIFICATION FOR A FRAME SAMPLE

To more clearly illustrate the parameter-identification method of the frame using the static measured displacements, the frame structure shown in Fig. 1 is analyzed. All frame “as-built” conditions have cross-sectional areas of  $A = 2.56 \times 10^{-2} \text{ m}^2$  and a

moment of inertia of  $I = 5.46133 \times 10^{-5} \text{ m}^4$ . The modulus of elasticity is 206 GPa. Let us assume that damage exists in Member 2. The “as-is” cross-sectional areas and moment of inertia of Member 2 are unknown and required to be determined. The “as-is” cross-sectional areas and moment of inertia are shown as dotted lines in Fig. 2, Fig. 3, and Fig. 4. This study uses applied forces of 100 and -150 kN along 4 and 11 degrees of freedom to excite the structure. Three cases are selected in the measured displacement combinations for parameter identification in this study. The measured displacement combinations for Case 1 are along the 1 and 4 degrees of freedom; those for Case 2 are along the 1, 4, 10, and 11 degrees of freedom; and those for Case 3 are along the 1, 4, 7, 8, 10, 11, 13, and 16 degrees of freedom.


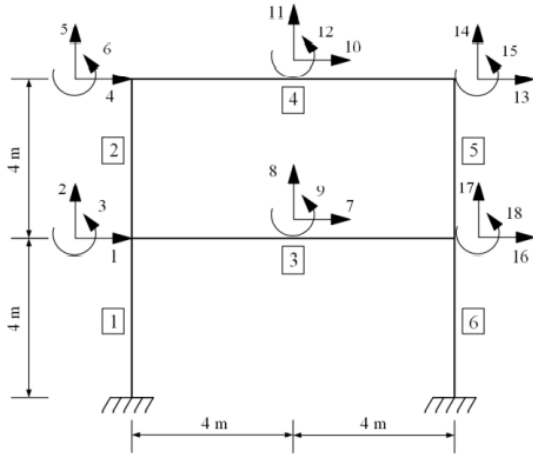



Figure 1. Frame sample for parameter identification

The objective function for the parameter identification can be obtained from Equation (1), and the interior-point method is used to optimize the objective function to obtain the damage condition of the frame. In this study, the starting points of cross-sectional variable  $A$  and moment of inertia variable  $I$  are  $1.28 \times 10^{-2}$  and  $2.73 \times 10^{-5}$ , respectively. The constraints on  $A$  are set between 0 and  $2.56 \times 10^{-2}$ , and those on  $I$  are set between 0 and  $5.46133 \times 10^{-5}$  according to the “as-built” condition and optimization method. Fig. 2 shows the changes in  $A_2$  and  $I_2$  during the optimization process for Case 1. The horizontal axis represents the iteration steps, while the vertical axis represents the values of  $A_2$  and  $I_2$ . Figure 2(a) and Figure 2(b) reflect that the process of searching the cross-sectional area and moment of inertia of the framedamaged member using the interior point method, respectively. The final results for the identification of the cross-sectional


area and moment of inertia of the

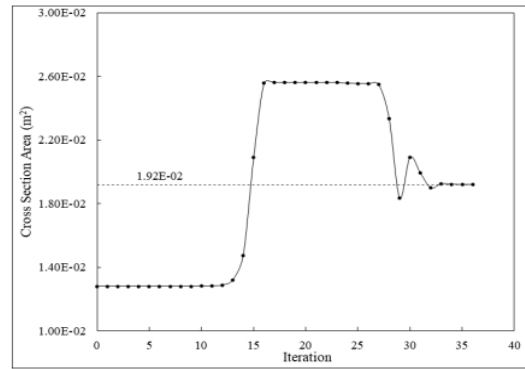

illustrates the plots of  $A_2$  and  $I_2$ , which is the cross-sectional areas and moment of inertia of damaged member, as a function of the iteration for case 2. The horizontal axis represents the iteration steps, while the vertical axis represents the values of  $A_2$  and  $I_2$ . The process of searching the cross-sectional area and moment of inertia of the damaged member using the interior point

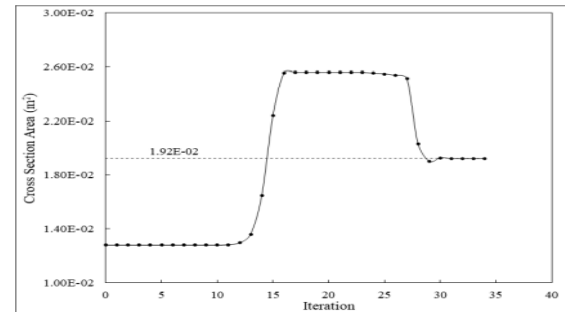


The changes in  $A_2$  and  $I_2$  during the optimization process for Case 3 is displayed in Fig. 4. The horizontal axis represents the iteration steps, while the vertical axis represents the values of  $A_2$  and  $I_2$ . Fig. 4(a) and Fig. 4(b) show that the process of searching the cross-sectional area and moment of inertia of the frame’sdamaged member are  $1.28 \times 10^{-2} \text{ m}^2$  and  $2.304 \times 10^{-5} \text{ m}^4$ , respectively. The results show that the final optimal value of  $A$  and  $I$  are identified and consistent with the “as-is” condition

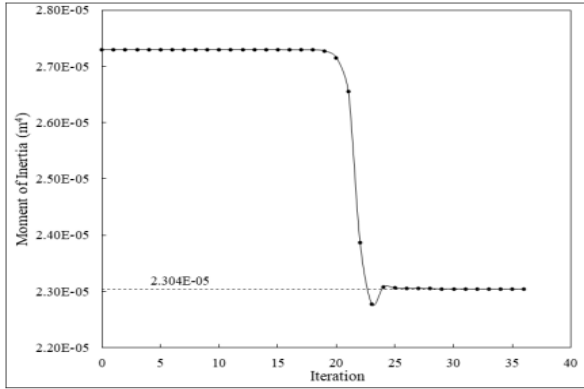


(b) Moment of inertia

method are shown in Figure. 3(a) and Figure. 3(b), respectively. The cross-sectional parameters of the frame's damaged member are  $1.28 \times 10^{-2} \text{ m}^2$  and  $2.304 \times 10^{-5} \text{ m}^4$ , respectively. The results indicate that the final optimal value of A and I are identified and consistent with the "asis" condition.

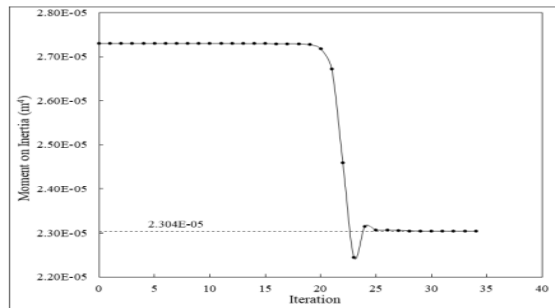



damaged member using the interior point method. The cross-sectional area and moment of inertia of the frame's damaged member are  $1.28 \times 10^{-2} \text{ m}^2$  and  $2.304 \times 10^{-5} \text{ m}^4$ . The identification results show that the final optimal value of A and I are identified and consistent with the frame's "as-is" condition.

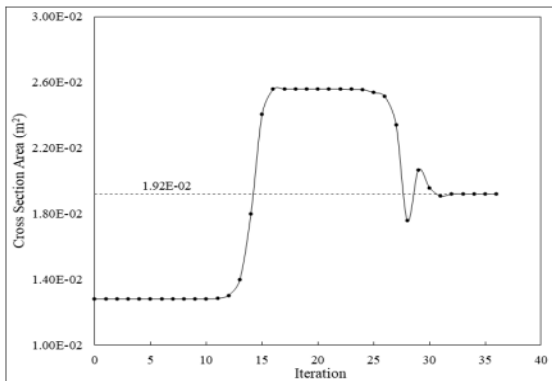


The changes in function value during the optimization process for Cases 1–3 are shown in Fig

5(a), Fig 5(b), and Fig. 5(c), respectively. With the process of optimization, the function value of the objective function gradually decreases to the best function value. The best function

a) Function value for Case 1

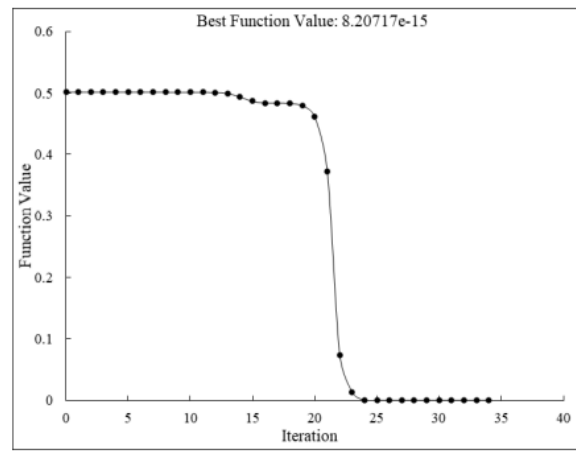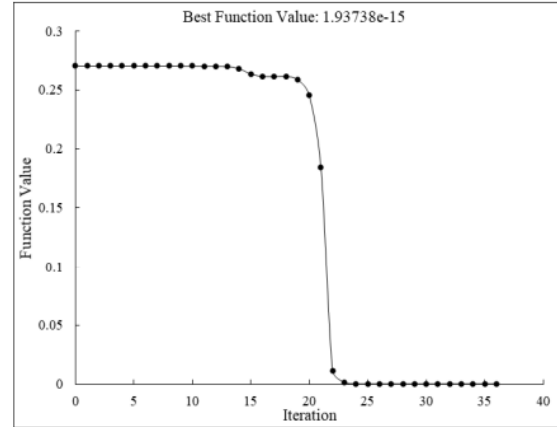

(b) Function value for Case 2

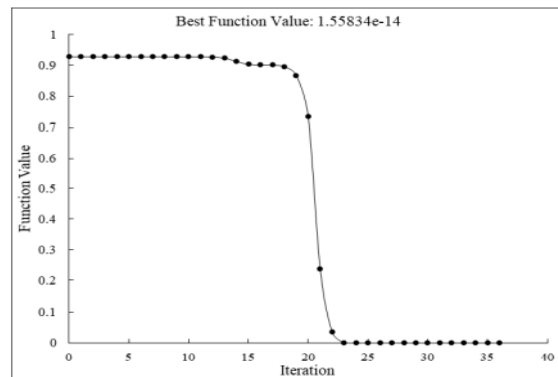

(c) Function value for Case 3

Figure 5. Function value for Cases 1–3

As can be seen from Figs. 2–5, The numbers of iteration steps for Cases 1–3 are 36, 34, and 36, respectively, which means that adding a large number of frame's measured displacements does not significantly improve the parameter-identification efficiency

## CONCLUSIONS

In this study, the parameter-identification method for a frame structure was analyzed using static displacement measurements. The structural parameter identification requires sufficient measured displacement data, but when the parameter identification is successful, adding more measured displacements does not significantly improve the optimization efficiency. Further, the number of the sensors should be optimized before the installation. CONFLICT OF INTEREST The authors declare that they have no conflicts of interest. AUTHOR CONTRIBUTIONS Weiwei Zhu and Feng Xiao conceived and designed the experiments; Weiwei Zhu analyzed the data; Weiwei Zhu wrote the paper. All authors had approved the final version. FUNDING This research was funded by the Natural Science Foundation of Jiangsu Province, Grant No. BK20200492.

## REFERENCES

[1] F. Xiao, D. Meng, Y. Yu, and Y. Ding, "Estimation of vehicle-induced bridge dynamic responses using fiber Bragg grating strain gages," *Science Progress*, vol. 2019, pp. 1–14, September 2019.

[2] M. Sanayei and M. J. Saletnik, "Parameter estimation of structures from static strain measurements I: Formulation," *Journal of Structural Engineering*, vol. 122, no. 5, pp. 555–562, May 1996.

[3] M. Sanayei and O. Onipedet, "Damage assessment of structures using static test data," *American Institute of Aeronautics and Astronautics*, vol. 29, no. 7, pp. 1174–1179, February 1997.

[4] P. Hajela and F. J. Soeiro, "Structural damage detection based on static and modal Analysis," *American Institute of Aeronautics and Astronautics*, vol. 28, no. 6, pp. 1110–1115, March 1990.

[5] J. H. Chou and J. Ghaboussi, "Genetic algorithm in structural damage detection," *Computers & Structures*, vol. 79, no. 14, pp. 1335–1353, June 2001.

[6] F. Bakhtiari-Nejad, A. Rahai, and A. Esfandiari, "A structural damage detection method using static noisy data," *Engineering Structures*, vol. 27, no. 12, pp. 1784–1793, October 2005.

[7] A. Kesavan, M. Deivasigamani, S. John, and I. Herszberg, "Damage criticality assessment in complex geometric structures using static strain response-based signal processing techniques," in *Proc. SPIE the International Society for Optical*, vol. 5764, pp. 542–552, May 2005.

[8] X. Z. Chen, H. P. Zhu, and C. Chen, "Structural damage identification using test static data based on grey system theory," *Journal of Zhejiang University SCIENCE*, vol. 6, no. 8, pp. 790–796, August 2005.

[9] A. Kaushik, B. A. Sundaram, S. Parivallal, A. K. Farvaze Ahmed, and K. Ravisankar, "Numerical studies on the damage locating vector approach for damage detection using static load data," *Procedia Engineering*, vol. 86, pp. 693–700, March 2014.

[10] C. H. Li and Q. W. Yang, "Structural damage detection using static test data," *Applied Mechanics and Materials*, vol. 501–504, no. 4, pp. 852–855, January 2014.

[11] L. Colombo, C. Sbarufatti, and M. Giglio, "Definition of a load adaptive baseline by inverse finite element method for structural damage identification," vol. 120, pp. 584–607, April 2019.

[12] S. Tian, Z. Yang, X. Chen, and Y. Xie, "Damage detection based on static strain responses using FBG in a wind turbine blade," *Sensors*, vol. 15, pp. 19992–20005, August 2015.

[13] F. Xiao, J. L. Hulsey, G. S. Chen, and Y. Xiang, "Optimal static strain sensor placement for truss bridges," *International Journal of Distributed Sensor Networks*, vol. 13, no. 5, pp. 1–11, April 2017. [14] F. Xiao, J. Fan, G. S. Chen, and J. L. Hulsey, "Bridge health monitoring and damage identification of truss bridge using strain measurements," *Advances in Mechanical Engineering*, vol. 11, no. 3, pp. 1–7, January 2019.

[15] A. Lozano-Galanta, M. Nogal, I. Paya-Zaforteza, and J. Turmo, "Structural system identification of cable-stayed bridges with observability techniques," *Structure and Infrastructure Engineering*, vol. 10, no. 11, pp. 1331–1344, November 2014.

[16] M. A. B. Abdo, "Parametric study of using only static response in structural damage detection," *Engineering Structures*, vol. 34, pp. 124–131, 2012.

[17] Q. W. Yang and B. X. Sun, "Structural damage localization and quantification using static test data," *Structural Health Monitoring*, vol. 10, no. 4, pp. 381–389, March 2010.

[18] T. Sohail, S. Saha, and D. Bandhyopadhyay, "Parameter identification of frame structure by noisy limited static strain data," *Indian Conference on Applied Mechanics*, pp. 1–5, July 2017.

[19] J. Liao, G. Tang, L. Meng et al., "Finite element model updating based on field quasi-static generalized influence line and its bridge engineering application," *Procedia Engineering*, vol. 31, pp. 348–353, 2012.

[20] S. R. H. Vaez, N. Fallah, "Damage identification of a 2D frame structure using two-stage approach," *Journal of Mechanical Science and Technology*, vol. 32, no. 3, pp. 1125–1133, April 2018.

[21] Y. Yang, S. Li, and L. Ling, "Study on the method of the damage identification for frame structure," *Applied Mechanics and Materials*, vol. 204–208, pp. 2824–2831, October 2012.

[22] A. Jamalkia, M. M. Etefagh, and A. Mojtahedi, "Damage detection of TLP and Spar floating wind turbine using dynamic

response of the structure,” *Ocean Engineering*, vol. 125, pp. 191–202, October 2016.

[23] E. T. Lee and H. C. Eunb, “Damage detection approach based on the second derivative of flexibility estimated from incomplete mode shape data,” *Applied Mathematical Modelling*, vol. 44, pp. 602–613, February 2017.

[24] E. Lofrano, M. Pingaro, P. Trovalusci, and A. Paolone, “Optimal sensors placement in dynamic damage detection of beams using a statistical approach,” *Journal of Optimization Theory and Applications*, vol. 187, pp. 758–775, October 2020.

[25] X. X. Cheng, G. Wu, L. Zhang, and F. B. Ma, “A new damage detection method for special-shaped steel arch bridges based on fractal theory and the model updating technique,” *International Journal of Structural Stability and Dynamics*, vol. 21, no. 3, pp. 1–23, November 2021

[26] A. Meixedo, J. Santos, D. Ribeiro, and R. Calçada, “Damage detection in railway bridges using traffic-induced dynamic responses,” *Engineering Structures*, vol. 238, pp. 1–13, July 2021.

[27] S. M. H. Pooya and A. Massumi, “A novel and efficient method for damage detection in beam-like structures solely based on damaged structure data and using mode shape curvature estimation,” *Applied Mathematical Modelling*, vol. 91, pp. 670–694, March 2021.

[28] A. Khosravan, B. Asgarian, and H. R. Shokrgozar, “Improved modal strain energy decomposition method for damage detection of offshore platforms using data of sensors above the water level - ScienceDirect,” *Ocean Engineering*, vol. 219, pp. 1–14, January 2021. [29] R. C. Hibbeler, “Structural analysis,” Upper Saddle River, NJ: Pearson Prentice Hall, 2009, pp. 565–604.