



**ISSN: 2454-9940**



**INTERNATIONAL JOURNAL OF APPLIED  
SCIENCE ENGINEERING AND MANAGEMENT**

**E-Mail :**  
**editor.ijasem@gmail.com**  
**editor@ijasem.in**

**[www.ijasem.in](http://www.ijasem.in)**

## Design of Cmos Receiver by Using Duel Power Lines

SHAIK ASMA1, K.CHANDRA SEKHAR2

### ABSTRACT:

The PLC is one in which the power pins and the power distribution networks of ICs are used for data communication as well as power delivery. PLC is used in order to reduce the number of input pins that an IC needs to couple the test data signals to each and every node. Hence to extract the test data signals from this power lines, so many receivers are in need at each and every nodes of the ICs or at places where we have to apply the test. For this purpose, PLC receivers are already designed. But all of them consume very high power. So, in this paper a power efficient CMOS PLC receiver for the same purpose in 180 nm CMOS technology under a supply voltage of  $V$  is designed with the help of Cadence tool. To achieve this much extreme low power, so many CMOS low power technics are successfully employed like the stacking method, resistor less approach etc. It is found that the power consumption of this new CMOS PLC receiver is only 1.228mW, which is too less than even half power of the presently existing design. Also the receiver is good in keeping the required level of noise immunity and could reduce the area consumption, since the circuit do not have any resistive elements.

**KEYWORDS:** Power Line Communication (PLC), power efficient CMOS PLC receiver, power consumption, stacking method.

### I.INTRODUCTION

Today's VLSI technology is advancing in such a way that the designers can incorporate a large number of functions inside a chip. Microprocessors are one of the best examples for this. Day by day the size of ICs reduces and the operations it can perform are increasing. So many challenges still exist such as, the need of proper provision for the thermally generated heat removal, the number of the input output pins that an IC needs, proper power supply injection etc., due to which there exists limits on

incorporating functions inside ICs. Also routing inside the IC too has a major role in it. There should also be the provisions in ICs like sensors to detect what is happening inside each and every point and if anything happens wrongly, the normal state have to be recovered. Even though the increase in system complexity is an advantage in the sense that the size of ICs can be reduced, with that there should be new inventions for proper data passage inside the same. The power line

1 M.Tech (VLSID) in Sri Sai Institute of Technology and Science, Rayachoty, AP.

2 Associate professor in Sri Sai Institute of Technology and Science, Rayachoty, AP.

communication aspect presented in this paper is one of such Methods. In power line communication, it efficiently uses the power distribution networks inside ICs since they are the only components that reach each and every node. So if there have a provision to pass the test data, which are used for fault diagnosis, scan design etc. to whichever areas we need to apply the test that will be an attractive way of communication in ICs, So that the routing overhead inside the ICs to pass these testing data can be intelligently avoided.

So in PLC, the power distribution networks are used for power delivery and also data communication. The test data are superimposed on the power signal and are transmitted through the power distribution networks of ICs rather than the separately allotted routing paths. Also the number of power pins can be reduced since there is no need to carry the test data through the input pins. Of course, adopting such a power line communication always has to overcome the extreme noise level at the power lines. So there should be effective methods to overcome the same. Essentially there is the need of receivers at each and every node to extract these data signals efficiently from the power lines. Many variants of the same already exist, but a power efficient design is not yet met. Why the receiver should be power efficient is because, otherwise if each unit of receiver consumes such huge power, the overall power consumption of the entire chip will increase by a large value, which is hard to afford.

In this project, such a power efficient CMOS PLC receiver is designed in 180nm CMOS technology under the supply voltage of 1.8 V. The methods that are incorporated to achieve the power reduction are very simple to understand and realize.

## II. PREVIOUS WORKS

In PLC area, previous works are already conducted to reduce the ICs smaller by incorporating the PLC to reduce the pin count, area and hence the cost of the chip. So many such works at the base levels are already

carried out in this area. Works are conducted in ICs to measure the data propagation loss from the main power supply to the internal nodes and also, communication technologies are put forward such as the Ultra

Wide Band (UWB) and Direct Sequence Code Division Multiple Access (DS CDMA) for successful test data passage inside ICs with reduced noise level.

At first, a data recovery block was designed which can extract the test data signals from the power line modulated with impulses in which Ultra Wide Band communication technology was adopted. The sensing scheme inside the recovery block was designed in such a way that it maintains very small Power Supply Rejection Ratio(PSRR) and it is found that the data recovery block was able to extract the data with about the amplitude of 90mV and with the period of 300pS. The design was implemented in TSMC .18 $\mu$ m CMOS technology which had a power consumption of 2.8mW.

Later, a work on the power distribution networks of microprocessors is carried out by using the UWB communication technology for test data transmission by superimposing UWB impulses on the power lines. Based on the resultant characteristics of the PDNs, a data recovery block design was proposed and the work was implemented in TSMC

.18 $\mu$ m CMOS technology under a supply voltage of 1.8 V with a pulse repetition rate of 200MHz and the resultant power consumption was at about 4.42mW.

A robust receiver for PLC was proposed in ICs which employs the differential Schmitt trigger as the third stage of the receiver for better noise immunity and also to tolerate supply voltage variations and drops. Thus the aim was on the robustness and the design was proposed in .18 $\mu$ m CMOS technology under a supply voltage of 1.8 V. The measurement results showed that the receiver can tolerate up to 22.2% of the supply voltage

drop under the signal-to- noise ratio (SNR) of 16.3 dB. The power consumption was 2.4mW.

A PLC receiver was designed in .18 $\mu$ m CMOS technology under a supply voltage of

1.8 V, which can be applicable to fault diagnosis, scan design, system debugging like low data rate communications. The receiver was designed with three building blocks, the level shifter, signal extractor, and the logic restorer. The main aim of this work was not the high data rate communication, but the robust operation under variations of supply voltage and droops. Amplitude Shift Keying (ASK) approach was put forward for the superimposition of the test data signals with the power lines. Adopting binary ASK has the advantage of less circuit complexity, simple and easy implementation and hence lower cost and area. But the main problem was on the ability to withstand the noise level that is present in the test data which couples through the power lines. To overcome the same, differential concepts are intelligently employed in the receiver which could achieve high level of noise rejection. Differential Schmitt trigger was the key building block in this design, since it was the major contributor for the noise immunity. The measurement results showed that the receiver can tolerate a voltage drop of up to .423 V, which has a power dissipation of 3.26mW and a core area of  $74.9 \mu\text{m} \times 72.2 \mu\text{m}$ .

So in this paper, a power efficient CMOS PLC receiver is designed to extract the test data signals superimposed on the power lines. The main aim was the power efficient operation since power is one of the most important criterions in the VLSI design. Also in the PLC, we not only need one or two of these receivers, but needs it in places wherever necessary or most probably at each and every nodes of the ICs. So, if each unit

consumes large power, the total power consumption of the entire IC will increase dramatically which is not affordable, and should mind that these receivers are used only for extracting the test data signals from the power lines and there will be so many other components

Inside the same IC for other operations. So power efficient design has its own importance in present VLSI design with increased complexity especially in microprocessor like ICs. This paper presents the design of such a power efficient CMOS PLC receiver in 180 nm CMOS technology under the supply voltage of 1.8V with the help of Tanner tool.

### III. PROPOSED POWER EFFICIENT CMOS PLC RECEIVER

The power efficient CMOS PLC receiver designed in this paper under a supply voltage of 1.8 V in 180 nm CMOS technology using tanner tool consists of three major building blocks, they are the level shifter, the signal extractor and the logic restorer. The block diagram of the proposed receiver is shown in fig. 1. The test data is represented by  $V_{dd}(t)$  and the main power signal by VDD. So  $V_{DD} + V_{dd}(t)$  represents the test data superimposed on the power lines. The input signal is the power line signal in which the test data is superimposed and it is supplied to each of the building blocks. The clock signal of amplitude 0-1.8V is supplied to the logic restorer. The output of the level shifter is the input of the signal extractor and the output of it, which is a differential signal and is applied to the logic restorer. The detailed operation and design concepts of each of the building blocks are described hereafter.


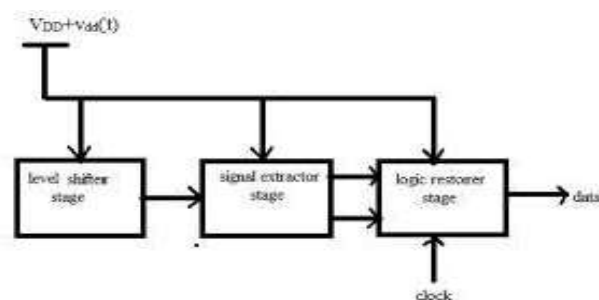


Fig. 1 Block Diagram of Proposed Power Efficient CMOS PLC Receiver

## 1. LEVEL SHIFTER

The level shifter is the first

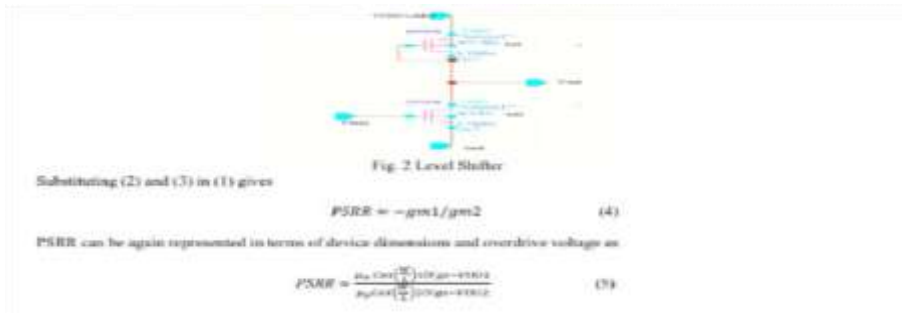

stage in the proposed PLC receiver which is nothing but a common source amplifier having diode. Since we need a level shifter having a low PSRR, the equation (5) can be treated in two connected load and is shown in fig. 2. The different ways. In order to reduce the PSRR, purpose of this level shifter is to lower the DC level of the signal at the output so that, it will be easy for the subsequent blocks to process either we can reduce the device dimension of transistor M1 and can increase the same of M2. Also the overdrive voltage of M1 should be lowered and that of M2 should be made superimposed on the power lines, this stage should have the ability to sense the variations that are present in the power lines and for that, it's sensitivity to the input signal is purposefully lowered and the same to power

signal is increased by lowering the characteristic called the Power Supply high compared to M1. These two concerns should be kept in mind while designing the level shifter stage for a smaller PSRR.

## 2. Signal Extractor

The signal extractor in the proposed power Rejection Ratio (PSRR) [3]-[5]. It can be efficient design is a differential amplifier expressed as in equation 1

having diode connected loads and is shown in Fig 3. The output of the level shifter is simultaneously fed to two input terminals of the differential amplifier, out of which a low pass filter is connected to one of the terminals. The low pass filter is used in this design to extract the DC value from the level shifter output. Since the differential amplifier has a property of rejecting the common mode signal, which is the DC signal in our design,

is thus successfully differential amplifier

$$PSRR = Av/Avdd \quad (1)$$

Where  $Av$  is the small signal voltage gain of the circuit and  $Avdd$  is the small signal voltage gain from supply voltage to circuit's output. The small signal voltage gain can be expressed in terms of  $gm$  as

$$Av \approx -gm1/gm2 \quad (2)$$

The small signal voltage gain from the supply voltage can be expressed as

$$Avdd = \frac{r_{o1}}{\left(\frac{1}{gm2}\right) + r_{o1}} \approx 1 \quad (3)$$

it in the

as 6



Fig. 3 Signal Extractor with Low Pass Filter

From equation (8), it is clear that for proper amplification, the device dimensions of the transistors can be adjusted. The signal extractor converts the single ended output of the level shifter to a differential signal. Also for the previous design of PLC receiver, the loads were resistive for the signal extractor and the same contributed to a larger extent to the power consumption of the entire circuit. In the proposed design, the resistive loads were replaced with diode connected transistors and the result of it was a further reduction in the power consumption of the receiver.

Where

$$gm = \mu Cox \left(\frac{W}{L}\right) (Vgs - Vth) \tag{7}$$

Expressing  $Av$  in terms of device dimensions, we have

$$Av \approx - \frac{\mu_n (W/L)_{(1\ or\ 2)}}{\mu_p (W/L)_{(3\ or\ 4)}} \tag{8}$$

From equation (8), it is clear that for proper amplification, the device dimensions of the transistors can be adjusted. The signal extractor converts the single ended output of the level shifter to a differential signal. Also for the previous design of PLC receiver, the loads were resistive for the signal extractor and the same contributed to a larger extent to the power consumption of the entire circuit. In the proposed design, the resistive loads were replaced with diode connected transistors and the result of it was a further reduction in the power consumption of the receiver.

**3.Logic Restorer**

The logic restorer is the block which contributes to a great part in the noise immunity of the entire system. It is a differential Schmitt trigger with tuneable hysteresis [2] property. The main advantage of using a differential Schmitt trigger is that, it is excellent in handling the situations of extreme noise and disturbances. The

differential Schmitt trigger employed in the design is shown in figure 4.

The key components that contribute to the hysteresis are the symmetrical loads and the cross coupled inverter pair. Stacking method is incorporated in the cross coupled inverter pair to reduce the power consumption considerably. Each transistor in the normal cross coupled inverter pair is replaced by four. The level shifter that is the common source amplifier with diode connected transistors each having a width of  $W/4$  and load is simulated with the proper bias due to which the leakage power reduces by a voltage at the gates of the transistor greater extent. By adjusting through the symmetrical the currents loads, the M2. The timing response obtained is shown below in fig. 5. regenerative feedback mechanism of the cross



coupled inverter pair can be control the hysteresis property. loads are selected to the application

achieve

According

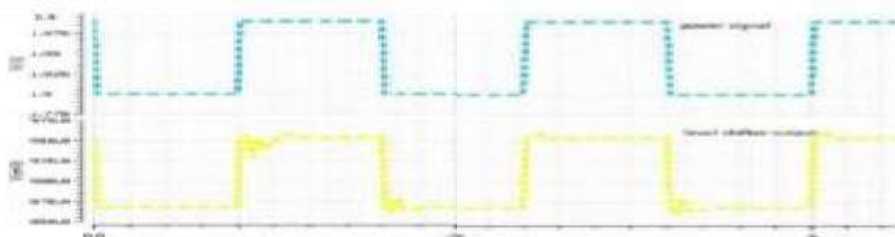


Fig. 5 Level Shifter Transient Response

adjusted to Symmetrical the linearity. of the data

signals, the clock signals switches and thus the currents to the differential amplifier also changes. It simply adjusts the gap between the low and high threshold voltages and thus improves the noise immunity of the receiver. The supply voltage superposition of the



Fig. 4 Differential Schmitt Trigger

is

wavef

V represents logic 1 and 1.8 v represents logic0. The bottom waveform shows the output signal of the level shifter. The output signal obtained is the level shifted version of the test data signal which is superimposed on the power lines.

#### IV.MEASUREMENT RESULTS

The proposed PLC receiver was designed and simulated in CMOS 0.18- $\mu$ m technology with a

f 1.89

supply voltage or 1.8 v. The measurement results followed are of the individual blocks and after all that of the final PLC receiver. Also the layouts of individual blocks are generated. The total power consumption of the PLC receiver is also calculated.

#### 1.Level Shifter

The layout of the level shifter is created with the help of cadence tool and is shown in fig. 6



Fig. 6 Level Shifter Layout

#### 2. Signal Extractor

The signal extractor is a differential amplifier having diode connected loads .The output of the level shifter is supplied directly to one of the differential amplifier input and the other input is fed from the output of the filter

attached to the second input terminal. The filter extracts the DC value from the signal to reject the common mode signals that is the DC levels in the input. The transient response of the signal

extractor is shown below in fig 7.

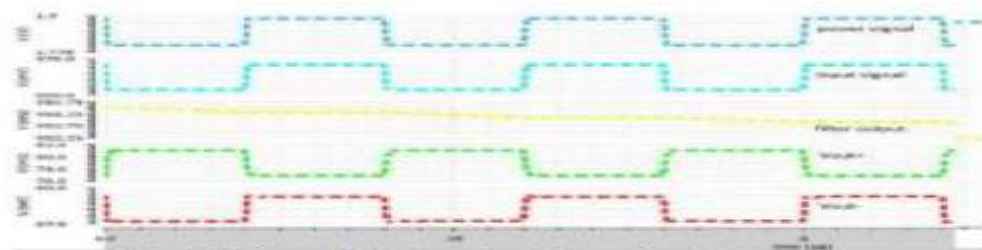
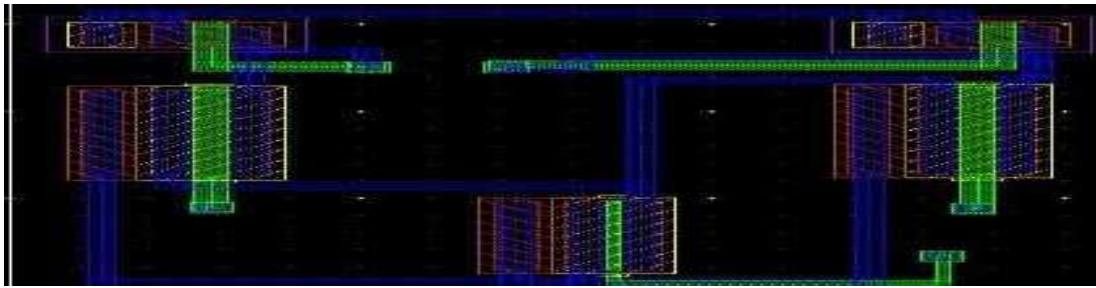


Fig. 7 Signal Extractor Transient Response

signals are applied and finally simulated the entire circuit. The simulation results of the logic restorer are shown in fig. 9

The top waveform is the input signals superimposed on the supply voltage. Second is the applied input signal which is followed by the output of the low pass filter and the outputs of the differential amplifier  $V_{out+}$  and  $V_{out-}$ . The noise level that was incorporated at the output of the differential


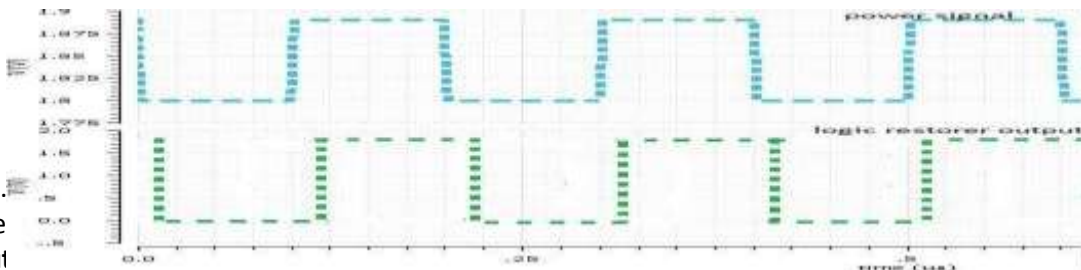


Fig. 9 Logic Restorer Output

### PLC RECEIVER



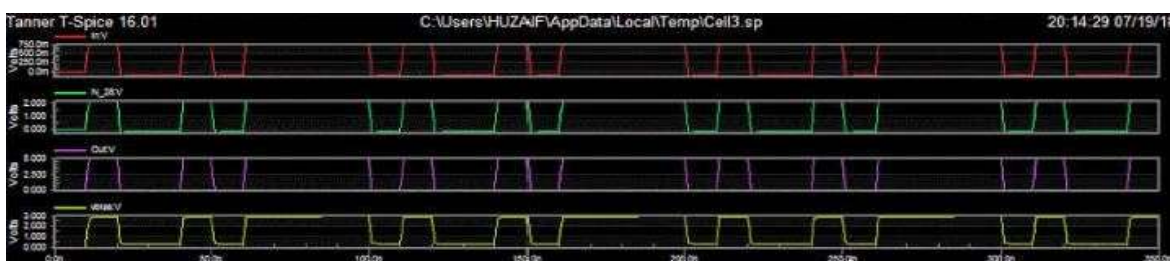

## Output wave form

### V.CONCLUSION

A power efficient CMOS PLC receiver which Signal generator can be incorporated in microprocessor like ICs to extract the test data signals from the power lines which are used for the low data rate communications such as scan design, system debugging, fault diagnosis etc. is designed and simulated in this work in CMOS 180 nm technology under the supply voltage of 1.8v. Also the layouts of each section are created with the help of the tanner tool.

The receiver mainly consists of three building blocks out of which the level shifter, the first block is responsible for shifting the data signal DC level to somewhat half of the supply level. The PSRR of the same is lowered to a smaller extent to make the output signal sensitive to the supply voltage. The signal extractor which is a differential amplifier having diode connected loads along with a low pass filter in which a biased NMOS transistor and a capacitor are the main components is used to eliminate the DC value from the signal to mitigate the supply voltage variations and droops. The third block which is responsible for the noise immunity of the entire receiver is a differential Schmitt trigger and in which to contribute to the power reduction, stacking method is put forward in the cross couple d inverter section. The proposed work is a resistor less approach which has its own significance in the power reduction and also the low power CMOS technique called the stacking method could also contributed to achieve the aim. This new work could reduce the power consumption to less than half of the presently existing CMOS PLC receiver [1] and is found to be 1.228mWs. Due to the same, the total power consumption of the entire IC in which these receivers play the role can also be reduced. Also the area is also reduced in this proposed work.

At the time of the implementation and testing of the designed PLC receiver in the real IC environment, a little more noise level is expected, since the power lines in which the test data is to be superimposed were noisy b

ut still it performs well at its best to reproduce the test data signals from the power lines.

### REFERENCES

- [1] Jebreel M. Salem and Dong Sam Ha, "dual use of power lines for design for testability-A CMOS receiver design," IEEE Trans. Very LargeScale Integr. (VLSI), 2015
- [2] F. Yuan, "Differential CMOS Schmitt trigger with tunable hysteresis," AnalogInteg. Circuits Signal Process. vol. 62, no. 2, pp. 245–248, Feb.2010.
- [3] B. Razavi, Design of Analog CMOS Integrated Circuits. NewYork, NY, USA: McGraw-Hill, 2001.
- [4] P. R. Gray, P. J. Hurst, S. H. Lewis, and R. G. Meyer, Analysis and Design of Analog Integrated Circuits, 5th ed. New York, N Y, USA: Wiley,2009.
- [5] P. E. Allen and D. R. Holberg, CMOS Analog Circuit Design, 3rd ed. London, U.K.: Oxford Univ. Press, 2002.
- [6] J. Salem and D.S. Ha, "A robust receiver for power line communications in integrated circuits," in Proc. IEEE 55th Int. Midwest Symp.Circuits Syst. (MWSCAS), Aug. 2012, pp. 254– 257.
- [7] V. Chawla, R. Thirugnanam, D. S. Ha, and T. M. Mak, "Design of a data recovery block for communications over power distribution networks of microprocessors," in Proc. 4th IEEE Int. Conf. Circuits Syst. Commun., May 2008, pp. 708–712.
- [8] R.Thirugnanam, D. S. Ha, and T. M. Mak, "Data recovery block design for impulse modulated power line communications in a microprocessor,"in Proc. IEEE Comput. Soc. Annu. Symp. VLSI, May 2007, pp. 153–158.